



10U for Shoei GT-Air Quick Start Guide

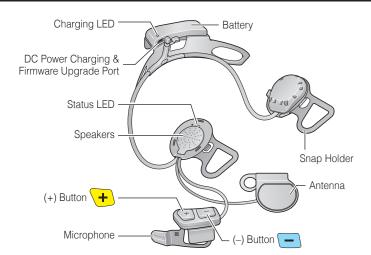





Installation











Charging



Getting Started




Remove the plastic tape from the battery slot to begin using the Remote Control.

Button Operation



Power On/Off

Headset



(-) Button

Remote Control

Tap Double Tapping





Remote Control Pairing









You can control the headset using the Remote Control only after you pair them together.







Phone, Music Pairing





Select Sena 10U

Bluetooth



Music Operation



















18.Apr

Note:

(-) Button

















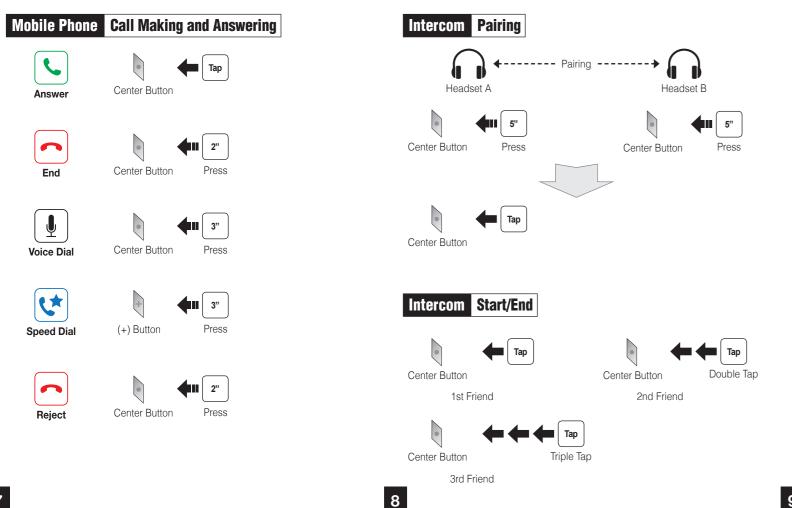

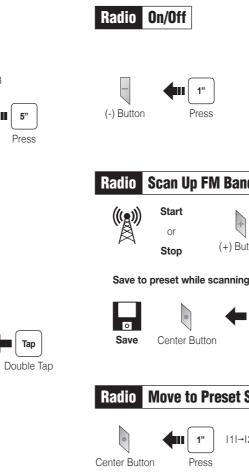

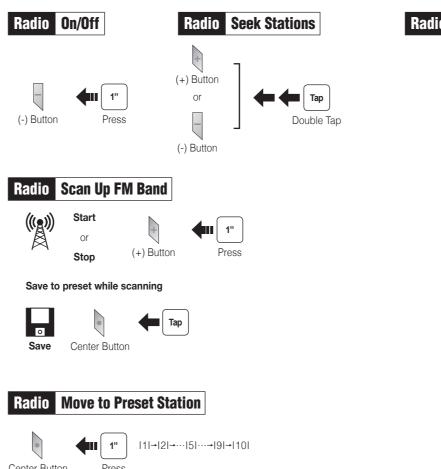

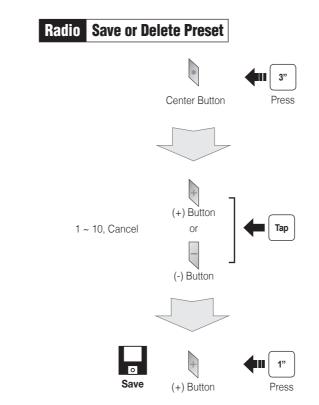







settinas.

Configuration Menu





Using the Sena Device Manager

Using the Sena Smartphone App

2. Pair your smartphone with the headset.

Setting to configure the headset settings.

leaflet included in the package.

Connect the headset to your computer via a USB cable. Launch the Sena

For details about downloading the Sena Device Manager, please refer to the

1. On your smartphone, download the Sena Smartphone App for Android or

3. Run the Sena Smartphone App. Swipe the screen to the right and tap

iPhone from Google Play or App Store. Please refer to

www.sena.com/headset-app/ for more details.

Device Manager and click **DEVICE SETTING** to configure the headset

Factory Reset

operations.

Remote Control Disconnection

If you want to restore the 10U to factory default settings, use the Factory Reset in the configuration menu. The headset automatically restores the default settings and turns off.

If the Remote Control becomes disconnected with your headset, replace the

to the User's Guide at www.sena.com for details on headset control button

Remote Control's battery or go through the pairing process again. Meanwhile, you can use the headset control buttons to operate the headset. Please refer

Fault Reset

If the 10U is not working properly for any reason, reset by gently pushing the pin-hole reset button located on the left speaker.



A full version of the manual is downloadable at www.sena.com.

SENA

Sena Technologies, Inc.

Customer Support: support.sena.com E-mail: support@sena.com

MP0501654_1.0_EN_April2018