SENA





Downloadable Sena Software

Download the SENA MOTORCYCLES App at Google Play Store or App Store.



SENA MOTORCYCLES

• Device configuration setting

Download the **Sena Camera App** at **Google Play Store** or **App Store**.



Sena Camera

• Live preview, video setting

Download the following items at sena.com.



Firmware



Sena Device Manager

- Firmware upgrade
- Device configuration setting




Quick Start Guide, User's Guide


Follow us on Facebook, YouTube, Twitter and Instagram to check the latest information and helpful tips.



SENA Technologies, Inc.Customer Support: **sena.com**


■ Product Details






Installation


• For more information about installation, refer to the User's Guide.















■ Mesh Intercom Antenna

Pull the Mesh Intercom Antenna inwards slightly to unfold it.



Icon Legend



Tap button/Jog Dial the specified number of times



Press and Hold button/Jog
Dial for the specified amount
of time







Rotate Jog Dial clockwise (right) or counterclockwise (left).







Rotate while Pressing Jog Dial clockwise (right) or counterclockwise (left).



"Hello"

Audible prompt

Basic Operations













■ Checking the Battery Level



Phone Pairing



② Select **50C** in the list of Bluetooth devices detected.



• For more information on phone pairing, refer to the User's Guide.

Using the Phone












■ Siri and Google Assistant

Activate the Siri or Google Assistant Installed on Your Phone









Music Control

Play/Pause





Track Forward





Track Backward





■ Camera Controls

Camera On









"Camera on"

Camera Off









"Camera off"

Start Recording







Blinking twice



Stop Recording







Blinking twice




"[Shutter sound]"

Take Photos










Format SD Card




Note:

- If the video resolution is 2160p/30fps, you cannot take a photo during video recording.
- You cannot record videos without a microSD card.
- Your microSD card needs to be formatted before using the camera.
- MicroSD cards up to 128 GB and U3 or higher cards are compatible.

Change Wi-Fi Channel (Default: 5 GHz)



2 Select 5 GHz or 2.4 GHz.



Note: IF YOUR SMARTPHONE OR REGION DOES NOT SUPPORT 5 GHZ, YOU MUST CHANGE THE WI-FI CHANNEL TO 2.4 GHZ.

■ Mesh Intercom[™]

Open Mesh™: communication within the same channel. **Group Mesh™**: communication within the same private group.

• For more information on **Mesh Intercom**, refer to the User's Guide.

Mesh Intercom On



Mesh Intercom Off



Note: When **Mesh Intercom** is on, the **50C** will automatically connect to nearby **50C** users and the headset will be in **Open Mesh (default: channel 1) initially**.

Open Mesh


Channel Setting (Default: channel 1) in Open Mesh

① Enter into the Channel Setting.



2 Navigate between channels.

$$(1 \rightarrow 2 \rightarrow \bullet \bullet \bullet \rightarrow 8 \rightarrow 9 \rightarrow Exit \rightarrow 1 \rightarrow \bullet \bullet \bullet)$$



3 Save the channel.




Note: You can use the **SENA MOTORCYCLES App** to change the channel.

■ Group Mesh

Group Mesh is a closed group intercom function that allows users to join, leave, or rejoin a group intercom conversation without pairing each headset.

1) Creating a Group Mesh

Creating a Group Mesh requires two or more Open Mesh users.



① Users (You, B, and C) enter into Mesh Grouping to create a Group Mesh.




When Mesh Grouping is completed, the users (You, B and C) will hear a voice prompt on their headset as Open Mesh switches to Group Mesh.



2) Joining an Existing Group Mesh

One of the current users in an Existing Group Mesh can allow new users (one or more) in Open Mesh to join the Existing Group Mesh.



① One (You) of the current users in the Existing Group Mesh and new users (D and F) in Open Mesh enter into Mesh Grouping to join the Existing Group Mesh.



When Mesh Grouping is completed, the new users (D and F) will hear a voice prompt on their headset as Open Mesh switches to Group Mesh.



■ Enable/Disable Mic (Default: Enable)

Users can enable/disable the microphone when communicating in a **Mesh Intercom**.



Reset Mesh

If a headset in an **Open Mesh** or **Group Mesh** resets the **Mesh**, it will automatically return to **Open Mesh (default: channel 1)**.



Bluetooth Intercom

Up to three other people can be paired with the headset for Bluetooth intercom conversations.



Intercom Pairing

There are two ways to pair the headset.

Using the Smart Intercom Pairing (SIP)

SIP allows you to quickly pair with your friends for intercom communication by scanning the QR code on the SENA MOTORCYCLES App without remembering the button operation.

- ① Pair the mobile phone with the headset.
- ② Open the SENA MOTORCYCLES App and tap (Smart Intercom Pairing Menu).

- 3 Scan the QR code displayed on your friend (B)'s mobile phone.
 - Your friend (B) can display the QR code on the mobile phone by tapping :> QR code (體) on the SENA MOTORCYCLES App.



- Tap Save and check that your friend (B) is paired with you (A) correctly.
- ⑤ Tap Scan (〇) and repeat steps 3-4 to pair with Intercom Friends (C) and (D).

Note: The **Smart Intercom Pairing (SIP)** is not compatible with Sena products that use **Bluetooth 3.0** or **below**.


Using the Button



1) The users (You, B) enter into Intercom Pairing.



② The **users' headsets** will be automatically paired.



3 Repeat the steps above to pair with other headsets (C and D).

■ Last-Come, First-Served

If a headset has multiple paired headsets for intercom conversations, the last paired headset is set as the first intercom friend.

Intercom Pairing Order

Last-Come, First-Served



■ Two-way Intercom

Start/End Conversation with the First Intercom Friend D





Start/End Conversation with the Second Intercom Friend C





Start/End Conversation with the Third Intercom Friend B





■ FM Radio

FM Radio On/Off



Start/Stop Scanning



Seek Forward





Seek Backward





Navigating Preset Stations



Note: You can save current station from the **Sena Device Manager** or the **SENA MOTORCYCLES App**.

■ Headset Configuration Menu

Accessing the Configuration Menu









"Configuration menu"

Navigating Between Menu Options












Execute Menu Options




■ Troubleshooting

Fault Reset




Note: Fault Reset will not restore the headset to the factory default settings.

Factory Reset



Quick Reference

TYPE	OPERATION	BUTTON COMMANDS
Basic Operations	Power on / Power off	P (TAP)
	Volume up / Volume down	ROTATE OF L
Camera	Camera On	C (ÎX)
	Camera Off	P (1x)
	Start/Stop recording	C HOLD 1s
	Taking Photos	
Mobile Phone	Answer phone call	P (TAP)
	End phone call	P (1x)
	Reject phone call	HOLD 2s

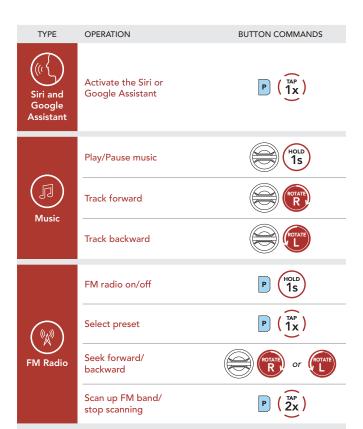

TYPE	OPERATION	BUTTON COMMANDS
Mesh Intercom™	Mesh Intercom on/off	$M \left(\underbrace{1x}_{x} \right)$
	Channel setting	$M \left(\underbrace{2x}_{TAP} \right)$
	Mesh Grouping	M HOLD 5S
	Reset Mesh	M (8s)
	Enable/Disable Mic	M (HOLD 1s)
(((o))) Intercom	Intercom pairing	HOLD 5s
	Start/End intercom	(TAP)